

TOLSEN **FX** FORCE XPRESS


79598

79599

EXHAUST FAN

INSTRUCTION MANUAL

220-240V ~ 50/60Hz

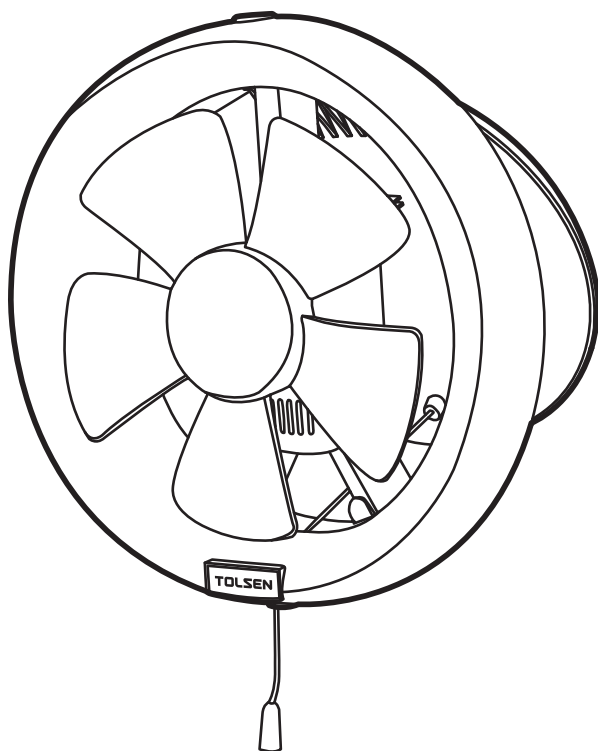


SAVE THIS MANUAL !

You will need this manual for safety instructions, operating procedures and warranty.
Put it and the original sales receipt in a safe dry place for future reference.

Cautions

1. Use this fan at the rated voltage and frequency indicated on the name plate.
2. This fan is not designed for use near or cooking equipment as cooking food extration.
3. Install this fan where it would not be exposed to large water splash or excess vapor.
4. Never install this fan in the ceiling.
5. The distance between fan and building floor is more than 2.3m.
6. Connect the power cord. When power comes from socket ,the plug must accord with IEC-335,
When the power cord is connected with charging line directly,all-polarity switch that the contact gap is 3 mm at least must be installed in the charging line.
7. Children should be ensure that they do not play with the appliance.
8. This applianceis not intended for use by persons(including children)with resuce physical, sensory or mental capabilities, or lack of experidence and knowledge, unless they have been given supervision or instrtuction concerning use of the appliance by a person respon sible for their safety.

Name Of Parts And Outline Dimensions

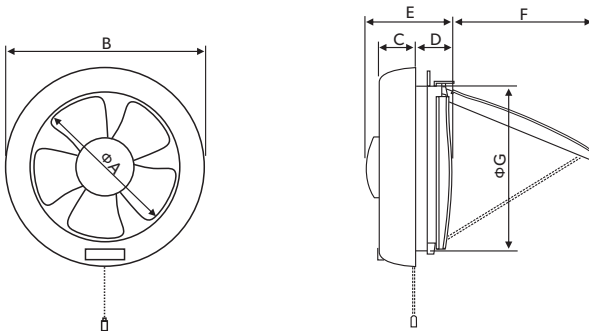


Dimensions:mm

Model	A	B	C	D	E	F	G
79598	150	208	38	42	87	145	177
79599	200	272	42	55	105	180	240



Installation

I

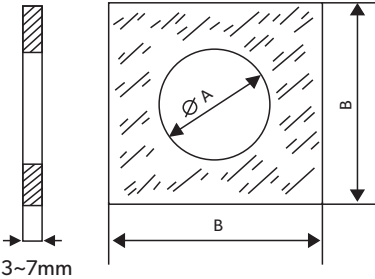


Model	A	B
79598	182-185mm	$B \geq 250\text{mm}$
79599	245-248mm	$B \geq 300\text{mm}$


II




III




IV



V

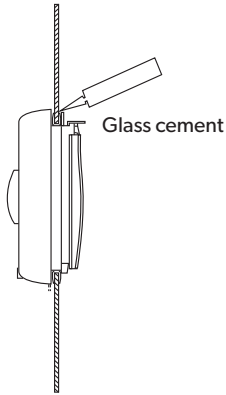


Wiring Diagram

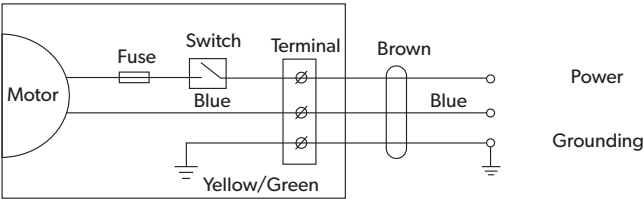

Specifications

Model No.	Fan Size (mm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Air Delivery (M ³ /h)	Speed (RPM)	Noise (dB)
79598	150	220-240	50/60	15	210	2100	40
79599	200	220-240	50/60	20	300	1900	42

Operation

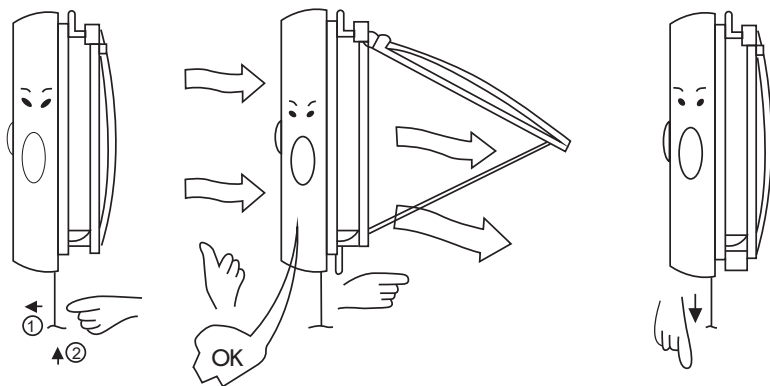

Maintenance Cautions

1. Disconnect power source before unit maintenance. Routine maintenance must be done every year.
2. Do not allow water enter to motor .
3. Do not immerse plastic parts in water over 60°C.
4. Never use petrol, benzene, thinner or any other such chemicals for cleaning the ventilating fan.
5. If the supply cord damage, must either it assians the service department by this company or similar specialized electrical personnel to replace.

CE DECLARATION OF CONFORMITY

WE
SUZHOU TOLSEN TOOLS CO.,LTD.
198 HUASHAN ROAD, ZHANGJIAGANG,
JIANGSU, CHINA

Declare that the product
79598/79599
EXHAUST FAN


Complies with the essential health and safety requirements of the following Directices:
Directive 2014/35/EU

Standards and technical specifications referred to:
EN 60335-2-80: 2003 + A1: 2004 + A2: 2009
EN 60335-1: 2012 + A11: 2014 + A13: 2017
EN 62233: 2008

Authorised Signatory and technical file holder

Signed for and on behalf of:
SUZHOU TOLSEN TOOLS CO.,LTD.
198 HUASHAN ROAD, ZHANGJIAGANG,
JIANGSU, CHINA
ZHANG XING YU
Group Quality Director
on:07/02/2022



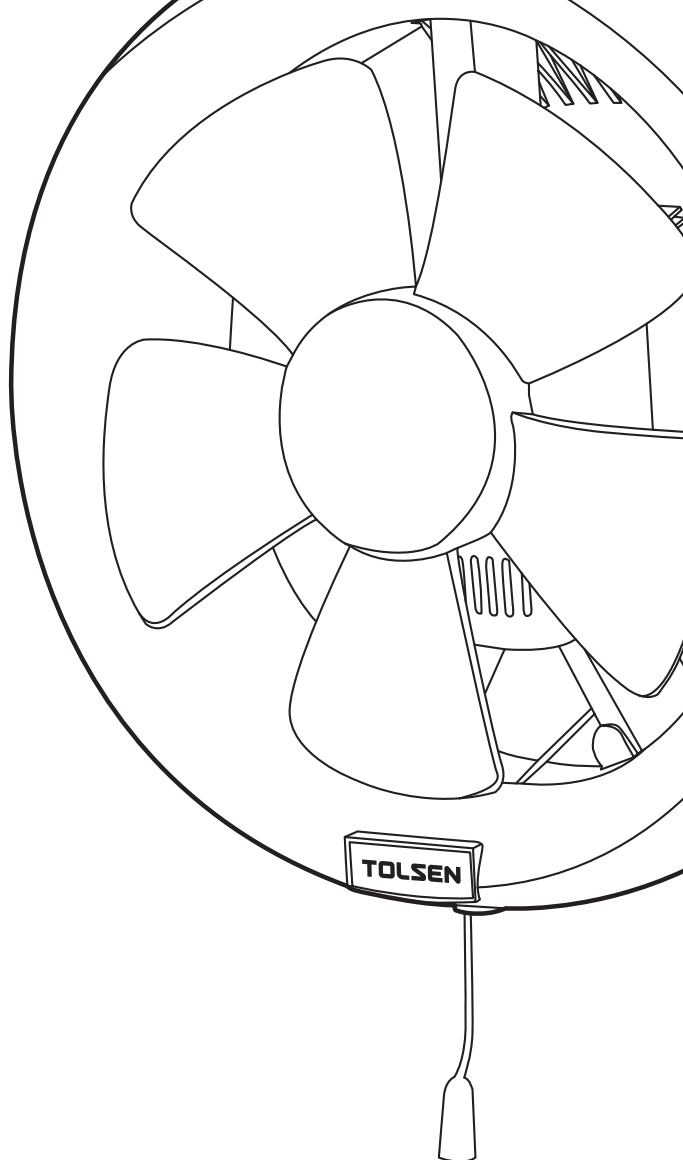

**SUZHOU TOLSEN
TOOLS CO.,LTD.**

www.tolsentools.com

TOLSEN is a trademark or
registered trademark of TOLSEN
TOOLS. All rights reserved.
MADE IN CHINA



SCAN TO VISIT
PRODUCT LINK